

## GR Series

**MODEL GRM45-FRU2**  
BARRIER FREE, BI-LEVEL  
FREEZE RESISTANT, PEDESTAL  
MOUNTED DRINKING FOUNTAIN

### STANDARD FEATURES

- Resistant to sunlight, heat, moisture and wear
- 18 gage, 304 stainless steel bowl
- 12 gage, heavy duty stai
- less steel, corrosion and scratch resistant finish
- Polished stainless steel, anti-rotation non-squirt bubbler
- 100 mesh inlet strainer
- Access door, heavy duty stainless steel, vandal resistant
- Vandal resistant stainless steel bottom plate
- Freeze resistant valve system

### SUGGESTED SPECIFICATIONS

Model GRM45-FRU2 is a barrier free pedestal mounted, vandal resistant, freeze resistant, bi-level round drinking fountain made from 18 gage, 304 stainless steel bowls mounted into a green powder coated 12 gage, heavy duty stainless steel pedestal. Unit shall be activated by front mounted pushbuttons, by using less than 5 pounds of force, which pneumatically activates water valves mounted below the frost line. Internally mounted adjustable stream regulators shall control the water flow. Bubblers shall be polished stainless steel with non-squirt features and operate on water pressure range of 20-105 psig. Unit shall be certified to Public Law 111-380 (NO-LEAD) and NSF/ANSI/CAN 61. Fixture meets ADA, ADA Standing Person, and ADA Child requirements when mounted appropriately.



### MODEL:

(Must Specify)

- ☐ GRM44-FRU2 Satin stainless finish
  - ☒ GRM45-FRU2 Green powder-coated (Shown)
  - ☐ GRM46-FRU2 Red powder-coated
  - ☐ GRM47-FRU2 Blue powder-coated
- Custom color finishes available upon request

### OPTIONS

(additional costs may be incurred)

- ☐ -CH30 Child height, 30" bubbler height
- ☐ -FS Foot spray [If added, model requires -FRU3]
- ☐ -IGM In-ground 14" mounting
- ☐ -JFFR1 Jug filler, recessed, freeze resistant, plain end with self-closing valve
- ☐ -LSR Bowl with Leaf and Debris Strainer <sup>1</sup>
- ☐ -PF Pet fountain receptor [If added, model requires -FRU3]

### NOTES:

1- Refer to Supplemental Submittal Sheet for details

Complies with the following standards:



Federal Public Law 111-380 (No Lead)



NSF/ANSI/CAN 61



Recyclable Product



Water Conserving Product

**Product Warranty**

⚠ WARNING: Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)


**MURDOCK MFG.** • 15125 Proctor Avenue • City of Industry, CA 91746 USA  
Phone 800-453-7465 or 626-333-2543 • [www.murdockmfg.com](http://www.murdockmfg.com)

Member of  
**MORRIS GROUP**  
INTERNATIONAL

## GR Series

### MODEL GRM45-FRU2

BARRIER FREE, BI-LEVEL, FREEZE RESISTANT  
PEDESTAL MOUNTED DRINKING FOUNTAIN

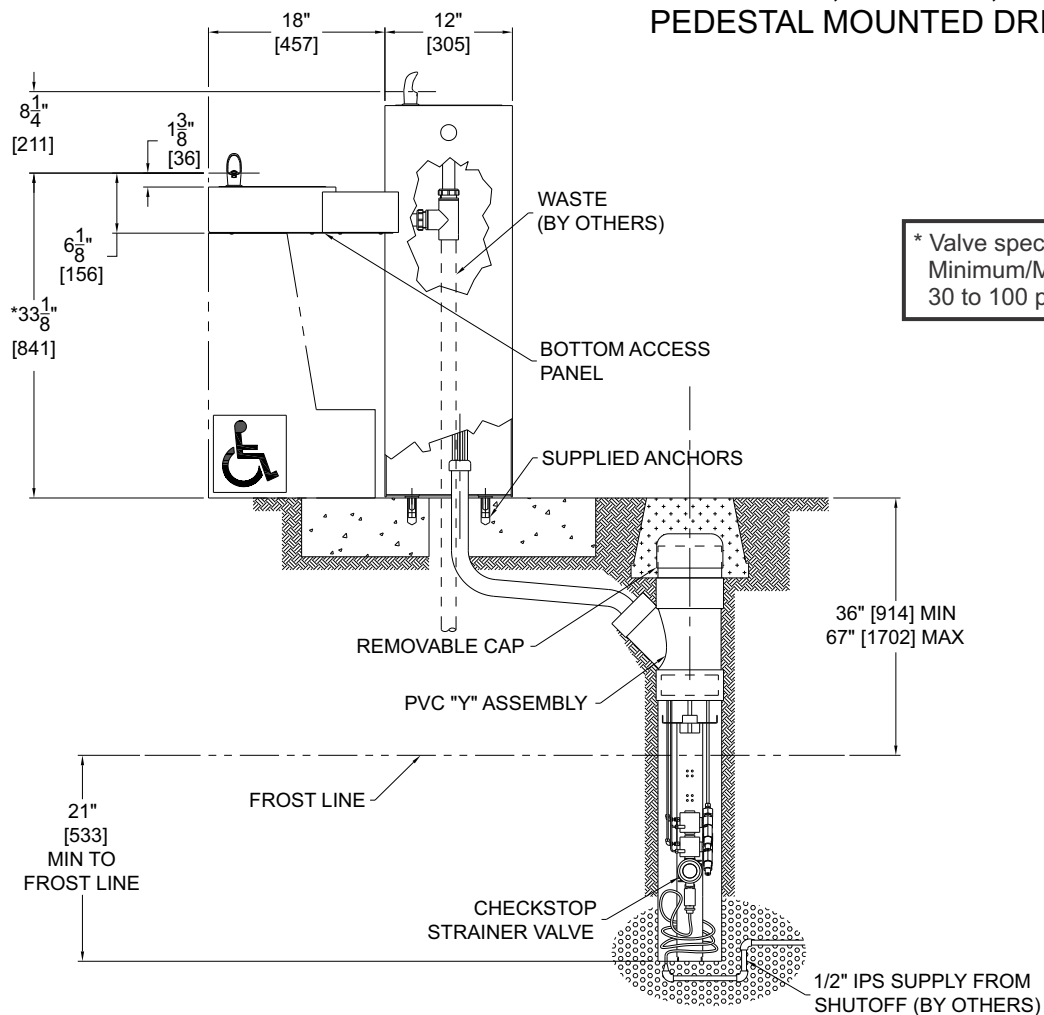

\* Valve specifications:  
Minimum/Maximum Pressure  
30 to 100 psi.

**GENERAL NOTES:**

1. ALL DIMENSIONS ARE IN INCHES [MM].

\*2. STANDARD ADA ADULT HEIGHT MODEL SHOWN. OPTIONAL -CH30 CHILD ADA HEIGHT MODEL AVAILABLE.

SELECTION SUMMARY  
& APPROVAL FOR  
MANUFACTURING

Model Number & Options \_\_\_\_\_ Quantity \_\_\_\_\_

Company \_\_\_\_\_

Contact \_\_\_\_\_ Title \_\_\_\_\_

Signature \_\_\_\_\_ Date \_\_\_\_\_  
(Approval for Manufacturing)

All dimensions are subject to manufactures tolerance of plus or minus 1/4" nominal and subject to change without notice. Murdock® assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock® Mfg., Member of Morris Group International®. Please visit [www.murdockmfg.com](http://www.murdockmfg.com) for most current specifications.